

09/831551

JCO8 Rec'd PCT/PTO 11 MAY 2001

PATENT
1781-0255P

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: LI, Sam Fong Yao et al. Conf.:
Int'l. Appl. No.: PCT/SG99/00117
Appl. No.: New Group:
Filed: May 11, 2001 Examiner:
For: DEVICE AND METHOD FOR CONCENTRATION
OF SAMPLES BY MICROCRYSTALLIZATION

PRELIMINARY AMENDMENT

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, DC 20231

May 11, 2001

Sir:

The following Preliminary Amendments and Remarks are respectfully submitted in connection with the above-identified application.

AMENDMENTS

IN THE SPECIFICATION:

Please amend the specification as follows:

Before line 1, insert --This application is the national phase under 35 U.S.C. § 371 of PCT International Application No. PCT/SG99/00117 which has an International filing date of November 10, 1999, which designated the United States of America and was published in English.

09/831551-000001

REMARKS

The specification has been amended to provide a cross-reference to the previously filed International Application.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. § 1.16 or under 37 C.F.R. § 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By James M. Slattery ^{Reg No 32,351}
James M. Slattery, #28,380

P.O. Box 747
Falls Church, VA 22040-0747
(703) 205-8000

JMS/cgc
1781-0255P

(Rev. 02/12/01)

09831531.080601

Device and Method for Concentration of Samples by Microcrystallization**Background of the invention**

1. Field of the invention

The present invention relates generally to the field of sample handling and to sample
5 preconcentration. More particularly, this invention relates to a method and device for
concentration of samples, such as analyte solutions, on the principle of crystallization.

2. Description of the prior art.

In order to meet the requirement of current environmental, biochemical and clinical
analysis, where more information is needed to be drawn from a small amount of samples,
such as blood or a solution containing quite small amount of interesting compounds, suitable
devices and methods need to be developed for handling and concentrating these samples.
The most widely used methods currently are based on extraction, such as solid phase
extraction, solid phase microextraction, and liquid - liquid extraction. There are also other
methods which could be used, such as evaporation. There is hardly any method for
concentrating sample solutions based on the principle of crystallization.

When a crystalline phase is formed from a fluid phase, the process is commonly
called crystallization. Due to the high selectivity by which atoms, ions, and molecules may
be built in a crystal lattice, crystallization has been used in industry for producing high
purity compounds. With the selected compounds (usually the major component in the
20 liquids, such as water in aqueous solutions and organic solvents in organic solutions)
crystallizing out from the liquid and becoming purified, the other compounds (usually the
minor components in the liquid, or analytes when they are the compounds of interest)
become concentrated in the remaining liquid. Freeze concentration is a process for
concentrating aqueous solutions by removing water in the form of ice. Using crystallization
25 to concentrate samples can provide several advantages over other concentration techniques
often used in analytical chemistry, such as extraction and evaporation. Compared with
methods of extraction, no organic solvent or any other reagents are needed during
crystallization, which will reduce the danger of contamination to samples and the cost for

disposing toxic reagents. Compared with evaporation, crystallization can be used to concentrate semi-volatile and volatile samples. In addition, crystallization can concentrate analytes in solid samples which can be changed into liquid state under certain conditions, such as heating them to a certain temperature. Few concentration techniques in current analytical chemistry can concentrate solid samples directly. Until now, there are only a few papers available which address concentration and analysis of organic solvents and anions in aqueous solution based on freeze concentration. The process of freeze concentration is usually quite long, generally several hours, and generally requires large sample solutions (at least several mL).

Recently, with the intense pharmaceutical drug discovery efforts, combinatorial chemistry is offering great challenges to analytical chemistry. Combinatorial chemistry is a style of synthesis in which selected building blocks are combined in different ways so as to produce large numbers, or libraries, of new molecular variants much more efficiently than is possible by traditional synthetic approaches (Chem. Rev., March 1997). It has given drug discovery units in pharmaceutical companies a crank with a very long handle, producing in a few days a 50,000 - compound library of new molecular structures. Subsequently compounds showing activity of the kind sought and their structures will need determining. In addition, most combinatorial methodologies yield only 0.1 to micromole quantities of product, which are localized on polymer beads, plastic "pins", or in microtiter plate wells. Thus, very high analytical sensitivities are demanded. The method described in the present invention which can concentrate analytes in small volumes and concentrate hundred or thousand of them simultaneously could be very useful and highly desirable.

Summary of this invention

The present invention is directed to a method and device which can simultaneously concentrate a plurality of samples in small volumes based on the principle of crystallization.

In one embodiment, there is provided a device for concentrating a plurality of samples comprising:

a first temperature control means having a plurality of container means for containing said plurality of samples;

a second complimentary temperature control means having a plurality of conducting means which are adapted to be inserted in respective samples in said plurality of container means; and

insulating means for insulating said first temperature control means from said second temperature control means such that an amount of heat from said plurality of samples is dissipated through said plurality of conducting means.

According to another embodiment there is provided a method for concentrating a plurality of samples comprising:

placing a plurality of samples in a first temperature control means having a plurality of container means for containing said plurality of samples;

inserting a conducting means into each of said samples, said conducting means being mounted relative to a second complimentary temperature control means;

cooling said plurality of samples by means of said first and second temperature control means to selectively crystallize components of said samples; and

removing said crystallized components from said samples.

The first and second temperature control means may include any suitable means for controlling the temperature of the plurality of samples. In a preferred embodiment, the first and second temperature control means comprise first and second cooling means. More preferably, each of the first cooling means and second cooling means comprises thermostat controlled cooling means for providing a constant temperature, a stable variable temperature, a temperature gradient, or a series of temperature gradients. In certain embodiments, the first and second temperature control means are individually selected from circulating heaters and coolers, heating and cooling blocks and slush baths.

In a preferred embodiment, the plurality of container means are located in a face of the first temperature control means, and the insulating means comprises a layer of insulating material disposed on a face of the second temperature control means opposing the face of the first temperature control means on which the plurality of container means are located. Most preferably, the plurality of conducting means passes from the second temperature control means through the insulating material and, in use, into the plurality of samples in the plurality of container means.

The insulating means preferably partly or completely prevents transfer of heat between the first temperature control means and the second temperature control means. In a particularly preferred embodiment, the insulating means comprises a plastic foam insulator.

5 The conducting means may comprise any suitable conducting material, and may be of any suitable form which facilitates the conduction of heat from the sample through the conducting means. Preferably, the plurality of conducting means comprises a plurality of wires. The wires may be formed from metal, polymer, inorganic or organic material, and preferably comprise copper wires, each wire optionally comprising an outer protective layer.

10 Furthermore, each of the wires may include a single wire, or may include a plurality of wires. Preferably, each of said wires has a diameter of from about several nanometers to several centimeters. More preferably, each of the wires has a diameter of about 1 millimeter.

15 The container means may comprise any suitable means for containing the plurality of samples. In a preferred embodiment, the container means comprises a plurality of wells, each of which receives one of the plurality of samples or is adapted to receive a sample container holding one of the plurality of samples. In this regard, the samples may be introduced directly into the wells, or may be placed into sample containers which are in turn placed in the wells. In the latter case, it is preferred that each sample container comprises
20 a tube, bottle or vial. In a particular embodiment, the sample container comprises a dialysis tube.

Once the samples are in place, the first and second temperature control means are generally moved from a loading position to an operative position in which the conducting means are inserted into respective samples. This may be achieved either manually or
25 automatically as desired.

In use, the conducting means, having been inserted in respective samples, and advantageously act as a support for nucleation during the crystallization. Further, in a preferred embodiment, as the crystallized components are crystallized on the conducting means acting as a support, the conducting means advantageously facilitates removal of the
30 crystallized components from the container means.

The crystallization of components of the samples will, as will be readily understood by a person skilled in the art, be carried out at a temperature which is dependent on the characteristics of the samples, and the desired final concentrate. However, the crystallization will generally be carried out at a temperature of from - 70°C to about 0°C.

5 As will be understood by a person skilled in the art, the samples may take any suitable form. In particular, the present invention may be used to concentrate various aqueous solutions, organic solutions, or solids which can be liquefied under certain conditions, for example at elevated temperature.

10 The solutions remaining in the sample containers are concentrated solutions which may be used for further analysis by other analytical instruments. Another cycle of concentration may also be carried out after the crystals on the wires are removed by heating or other methods.

15 While those skilled in art will recognize that there exists a multitude of applications relevant to the present invention, the invention will now be described in the context of the analysis of aqueous samples by freeze concentration, a particularly suitable application of the present invention.

Additional features, aspects and advantages of certain embodiments of the invention will be more fully understood when considered in connection with the accompanying drawings and the detailed description which follows.

20 **Brief description of the drawing**

Fig. 1 is a schematic diagram of the device of the present invention for concentration of a plurality of sample solutions simultaneously by microcrystallization. Only 3 x 6 array is shown for demonstration. The real device can be as much as 100 x 100 or more.

25 Fig. 2 is a schematic diagram of partial section view taken along one row of the sample containers when the device in fig. 1 is in operation.

Figs. 3A to 3D illustrates the process of ice growth and separation from the concentrated solutions during freeze concentration, taking one sample container as an

example.

Fig. 4 is the typical electropherograms, obtained by capillary electrophoresis, of five kinds of inorganic anions before and after applying the freeze concentration process of the present invention.

5 Fig. 5 is the typical electropherograms, obtained by capillary electrophoresis, of two phenols before and after applying the freeze concentration process of the present invention.

Fig. 6 is the typical electropherograms, obtained by capillary electrophoresis, of two proteins before and after applying the freeze concentration process of the present invention.

10 Figs. 7A and 7B are the chromatographs, obtained by gas chromatography, of organic solvents in wastewater before and after applying the freeze concentration process of the present invention.

The term "thermostat" as used hereafter refers to a temperature regulated cooling device.

Detailed Description of a preferred embodiment

15 Referring to Figure 1, a device for carrying out microcrystallization has two thermostats 11 and 12 for controlling temperatures, a plurality of wires 20 for conducting heat, a thermal insulator 30 between the thermostats 11 and 12, and a plurality of sample containers 50. Each of the wires 20 has two ends 21 and 22. The wires 20 are immobilized vertically and individually on the bottom of the thermostat 11 in an array so that their ends
20 21 are located in the thermostat 11 and their ends 22 lie outside the thermostat 11. The wire ends 22 also pass through the thermal insulator 30 which is immobilized on the outside bottom of the thermostat 11. On the top of the thermostat 12, a plurality of wells 40 are created in the same array pattern as that for the wires 20. The size and shape of the wells 40 should match the size and shape of the sample containers 50 so that the sample containers
25 50 can be put in and taken out easily from the wells 40 and there are little spaces between them when the containers 50 are in the wells 40. If the wells 40 can be removed from the thermostat 12, the well 40 can be sample containers also. The sample containers 50 could

have caps or no caps. In either way, the top of each of the sample containers 50 has a hole or space whose size is larger than any other inner space of the sample containers 50 so that the crystal produced can be removed with the wires 20 from the sample containers 50.

For operating the device of the present invention, sample solutions with known
5 volumes or solid samples with known weights are filled into the sample containers 50 first. Then containers 50 with the samples are put into the wells 40 individually. Finally, the thermostat 11 moves down so that each of the wire ends 22 is inserted into the individual sample containers 50 and immersed into the sample solutions. Fig. 2 illustrates the relative
10 positions of the thermostats 11 and 12, the sample containers 50 and the wires 20 at this stage. The temperature of the thermostat 12 is adjusted to set the temperature of the sample solutions in the sample containers 50, whereas the temperature of the thermostat 11 is
15 adjusted to an appropriate temperature at which the major components in the sample solutions will crystallize out. Time is recorded in order to control the time for the concentration. Finally, when most of the sample solutions in the sample containers 50 attain
20 crystalline state, the thermostat 11 moves up. The crystals produced will be removed, along with the wires 20, from the sample containers 50. The concentrated solutions will remain in the sample containers and can be moved with the sample containers 50 for further analysis. For another cycle of concentration, the crystals outside the wires 20 from the latest process can be removed by heating or other means. After washing the wire ends 22, the same procedure as described above can be used again.

As discussed above, the thermostats 11 and 12 can be any apparatuses that can control temperature. For example, circulating heater and cooler, heating or cooling blocks, thermoelectric devices, slush baths (low-melting-point liquids kept in a partially frozen state by either liquid nitrogen or dry ice), and many others apparatus known to those skilled in
25 the art. The choice of the thermostats depend on the temperature needed for crystallization. Usually the temperature given by the thermostat 12 should be in the range of temperatures between which the sample will be in liquid state, while the temperature given by the thermostat 11 should be in the range of temperatures between which the major components of the sample will be crystallized out. For example, when aqueous solutions need to be
30 concentrated, the thermostat 11 can be those which can control its temperature below 0 °C because the freezing point of water is 0 °C, and the thermostat 12 can be those which can

control the temperature above 0 °C. The heat produced in the sample containers 50 during formation of ice can be drawn through the wires 20 into the thermostat 11 and be dissipated. In such way, the ice can only form first on the outside of the wire ends 22 and then grow further into the other area of the solution. At the final stage, ice can be easily separated from the concentrated solutions because it will be removed together with the wires 20. If desired, the freeze concentration process may be accelerated by choosing a thermostat 11 which can generate a much lower temperature, for example, - 70 °C, or a thermostat 12 which can generate a temperature quite near 0 °C. It will be seen in the following examples that the growth rate of ice may be controlled in this way.

For purpose of conducting heat and separating the crystal produced, the preferred wires 20 should be those having good thermal conductivity and good mechanic strength. Metal wires, especially copper wires, usually is a good choice. However, other materials, such as polymers, can be used also. The diameter of the wires 20 can range from centimeters to several micrometers, or even to nanometers, depending on the volume or the amount of the sample needed for concentration. For small volumes of samples, thin wires 20 are preferred. Other considerations could be whether the material used will cause contamination or other unwanted effects to the samples because of contact of the wire ends 22 with the samples. For example, copper wire could be a problem for use to concentrate copper ions in aqueous solutions. Sometimes copper ions can cause damage to the activities of some enzymes. In such cases, a thin layer of another material is coated to the copper wires, or copper wires are not used.

The choice of sample containers 50 also depends on the samples needing concentration. For samples with small volumes, small containers are preferred. For some solid samples such as phenols, the material of the sample containers should be able to withstand the temperature used to melt the solid samples. For the purpose of separating the crystal from the concentrated solutions easily, the shape of the containers should preferably have a wide opening and a narrow bottom, like that of centrifuge tubes. In some cases, such as when using mass spectrometry (MS) to determine the structure of proteins, the sample containers can be dialysis tubes, or may contain a dialysis membrane so that the small ions can be removed as inorganic ions are non-volatile and MS is quite sensitive to them.

The thermal insulator 30 can be foam or any other suitable materials. Its purpose is to separate the two thermostats 11 and 12 effectively so that the heat produced is mainly dissipated through the wires 20, and therefore facilitate the control of the growth of crystals.

5 Besides concentrating aqueous solutions, the present invention can be used to concentrate organic solutions and solids, such as benzene, xylene and phenol.

Those skilled in the art will recognize that the foregoing description provide a method and a device which can concentrate a plurality of samples simultaneously based on crystallization. In the examples which follow, the ability of the present device to concentrate
10 minute amounts of analytes in aqueous solutions is demonstrated.

EXAMPLE 1

In this experiment the performance of the device of the present invention is demonstrated to concentrate five inorganic anions (Cl^- , SO_4^{2-} , NO_3^- , NO_2^- and Br^- , each at the concentration of $0.1 \mu\text{g/mL}$) in high purity water. A slush bath (prepared by mixing ethanol with dry ice) with a temperature of -70°C was chosen as the thermostat 11, and a water bath (room temperature 25°C) was used as the thermostat 12. The copper wires 20 were of diameter 1 mm. Eppendorf tubes with a volume of $500 \mu\text{L}$ were used as the sample containers 50. Time of concentration was recorded when the slush bath was poured into the thermostat 11.

20 Fig 3 is a schematic diagram illustrating the changes of the sample solutions in the sample containers 50 during freeze concentration (Fig. 3A, 3B, and 3C show the changes at 1, 5 and 7 minutes after the slush bath was added into the thermostat 11. Fig 3D shows the final stage when the ice and the wires 20 were separated from the concentrated solutions remaining in the sample containers 50.). From Fig. 3, it can be seen that the ice came out
25 first on the wires 50 and then spread into other areas of the solutions. With the anions continuously rejected from the ice front, they were concentrated in the remaining solutions. The whole process was finished in 8 minutes. Fig. 4A shows the electropherogram of the sample before concentration. Fig. 4B shows the electropherogram obtained after applying

the freeze concentration process of the present invention. It can be seen that nearly 15 times concentration was obtained.

EXAMPLE 2

One of the advantages of freeze concentration is that it can be used to concentrate volatile and semi-volatile substances in aqueous solutions. In this example, two phenols (phenol and 3-chloro-phenol, at the concentration of 5 µg/ml each) were concentrated by the device of the present invention. The conditions used were the same as those in the example 1. Fig. 5A shows the electropherogram of the samples before concentration. Fig. 5B shows the electropherogram obtained after applying the freeze concentration process of the present invention. It can be seen that nearly 8 times concentration was obtained.

EXAMPLE 3

Many biological molecules, such as proteins and RNA, could be damaged during high temperature or organic solvents treatments. Freeze concentration can be a good choice for concentrating such thermally labile and chemically sensitive biological molecules because it doesn't involve any high temperature or organic solvents. This example demonstrates concentrating two proteins (Lysozyme and Trypsin, at the concentration of 12.5 µg/mL and 17.5 µg/mL, respectively) using the device of the present invention. First the concentration of the protein solution by the conditions in the examples 1 and 2 was tested. Small concentration efficiency (about 1.5 times) was obtained. The reason may be due to the low diffusion coefficient of the proteins. The growth rate of the ice in the above conditions was significantly faster and may be larger than the diffusion rate of the proteins. Therefore, much of the protein molecules were included into the ice lattice. As such, the growth rate of the ice during freeze concentration was lowered. After using a slush bath (prepared by mixing ethanlene glycol with dry ice) with a temperature - 15 °C as the thermostat, nearly 100% recovery for both proteins was obtained. Fig. 6A shows the electropherogram of the samples before concentration. Fig. 6B shows the electropherogram obtained after applying the freeze concentration process of the present invention. It can be seen that nearly 12 times concentration was obtained.

EXAMPLE 4

This example illustrates that the present invention may be used to analyze real samples which are considered to be difficult by the current concentration methods. Methanol, ethanol and acetone are widely used raw materials because they are good solvents for many chemicals. Their concentrations in industrial wastewater and surface water have been increasing with the development of chemical industries. It is important to know their concentrations in wastewater in order to control these contaminants. Usually their concentrations need to be below 1 ppm after treatment of the wastewater. Because they are quite hydrophilic, solid phase extraction does not work well in this case. Suitable solvents have also not been found to extract them. However, it is quite easy to concentrate them using the present invention. In a particular example, a wastewater taken from a chemical company was filtered first through a 0.4 μm nylon membrane to remove solids in the solution. After filtration, 0.5 ml solution was filled into the Eppendorf tube in order to apply freeze concentration. Other conditions for freeze concentration were the same as that in example 1. The concentrated solution after concentration was injected directly into a GC instrument (HP series 5890 plus) to measure the concentration of acetone, ethanol and methanol. FIG. 7B shows the results after concentration using the present invention. FIG. 7A is the chromatograph of the solution after filtration. It can be seen from FIG. 7 that the present invention can be used directly to preconcentrate trace amounts of methanol, ethanol and acetone in wastewater for their analysis.

The foregoing description of specific embodiments of this invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be defined by the claims appended hereto and their equivalents.

References

Patent Documents

- 1) SU 1228015 30/04/1986 Dmitrichen M. M.
2) BE 794743 / US 3897409 29/07/1975 Bayer AG

5 Other Publications

- 1) Z. Zhou, E. Zheng, and D. Feng, "Determination of trace amount of organic solvent in water by freezing precencentration - gas chromatography", Nanjing Huagong Xueyuan Xuebao, Vol. 16, No. 1 (Jan. 1994), pp. 67-71.
- 2) V. V. Aliseichik, A. B. Blank and L. V. Vasetskaya, "Determination of anion impurities in high-purity water by ion chromatography with crystallization preconcentration", Khim. Tekhnol. Vody, Vol. 14, No. 9 (Sept. 1992), pp. 674-712.

[illegible]

Claims

1. A device for concentrating a plurality of samples comprising:

a first temperature control means having a plurality of container means for containing said plurality of samples;

5 a second complimentary temperature control means having a plurality of conducting means which are adapted to be inserted in respective samples in said plurality of container means; and

insulating means for insulating said first temperature control means from said second temperature control means such that an amount of heat from said plurality of samples
10 is dissipated through said plurality of conducting means.

2. A device according to claim 1, wherein said first and second temperature control means comprise first and second cooling means.

3. A device according to claim 2, wherein each of said first cooling means and said second cooling means comprises thermostat controlled cooling means for providing a constant temperature, a stable variable temperature, a temperature gradient, or a series of temperature
15 gradients.

4. A device according to claim 1, wherein said plurality of container means are located in a face of said first temperature control means and wherein said insulating means comprises a layer of insulating material disposed on a face of said second temperature control means
20 opposing said face of said first temperature control means, said plurality of conducting means passing from said second temperature control means through said insulating material and, in use, into said plurality of samples in said plurality of container means.

5. A device according to claim 1, wherein said insulating means partly or completely prevents transfer of heat between said first temperature control means and said second
25 temperature control means.

6. A device according to claim 1, wherein said insulating means comprises a plastic foam insulator.

7. A device according to claim 1, wherein said plurality of conducting means comprises

09831551-080601

a plurality of wires.

8. A device according to claim 7, wherein said plurality of wires are formed from metal, polymer, inorganic or organic material.

9. A device according to claim 8, wherein said wires comprise copper wires, each wire
5 optionally comprising an outer protective layer.

10. A device according to claim 7, wherein each of said wires has a diameter of from about several nanometers to several centimeters.

11. A device according to claim 10, wherein said each of said wires has a diameter of about 1mm.

10 12. A device according to claim 1, wherein said container means comprises a plurality of wells each of which receives one of said plurality of samples or is adapted to receive a sample container holding one of said plurality of samples.

13. A device according to claim 12, wherein each sample container comprises a tube, bottle or vile.

15 14. A device according to claim 13, wherein each sample container comprises a dialysis tube.

15. A device according to claim 1, wherein said first and second temperature control means are individually selected from circulating heaters and coolers, heating and cooling blocks and slush baths.

20 16. A device according to claim 1, wherein said first and/or second temperature control means are manually or automatically moveable from a loading position in which samples are loaded into said container means, to an operative position in which said conducting means are inserted into respective samples.

17. A method for concentrating a plurality of samples comprising:

25 placing a plurality of samples in a first temperature control means having a plurality of container means for containing said plurality of samples;

inserting a conducting means into each of said samples, said conducting means being mounted relative to a second complimentary temperature control means;

cooling said plurality of samples by means of said first and second temperature control means to selectively crystallize components of said samples; and

removing said crystallized components from said samples.

18. A method according to claim 17, wherein said conducting means conduct heat from said samples and act as a support for nucleation during said crystallization, and facilitate removal of said crystallized components.

19. A method according to claim 17, wherein said samples are in the form of aqueous solutions, organic solutions, or solids which can be liquefied under certain conditions.

20. A method according to claim 17, wherein said crystallization is carried out at a temperature of said second temperature control means of from about -70°C to about 0°C.

21. A method according to claim 17, wherein said first temperature control means is set at a temperature at which said plurality of samples would be maintained in a liquid state, and wherein said second temperature control means is set at a temperature at which selected components of said plurality of samples are crystallized out of solution.

22. A method according to claim 21, wherein said first temperature control means is set at a temperature above 0°C and said second temperature control means is set at a temperature below 0°C.

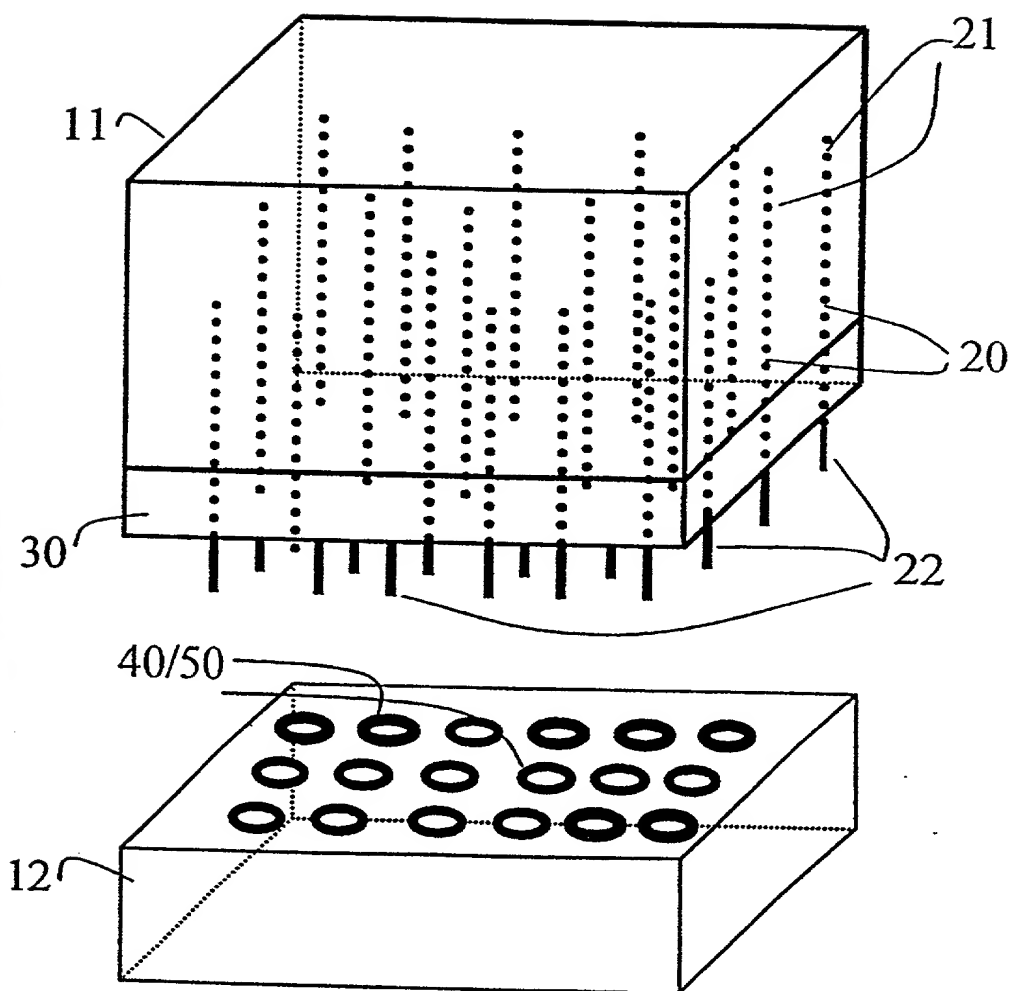


Fig. 1

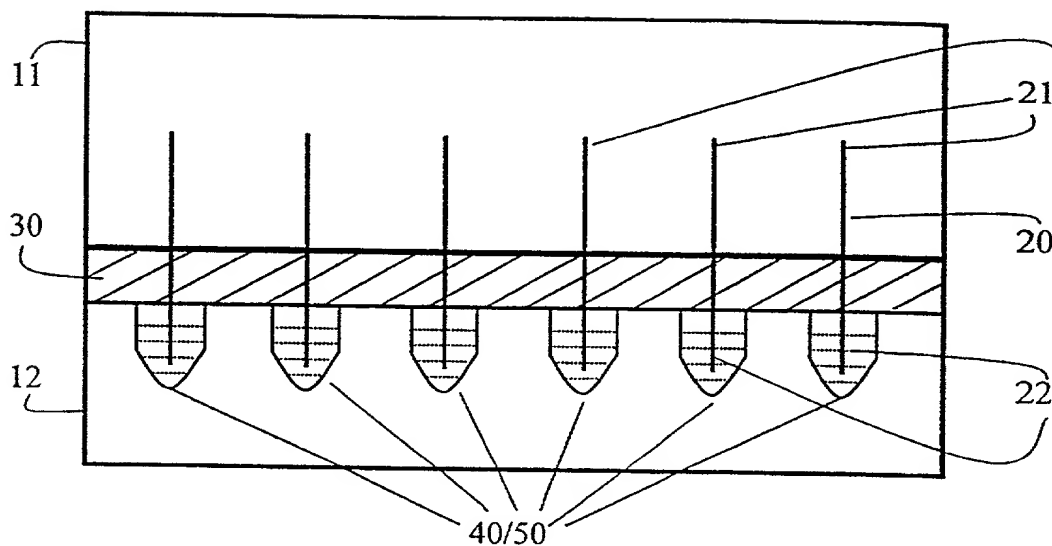


Fig. 2

09831551-080001

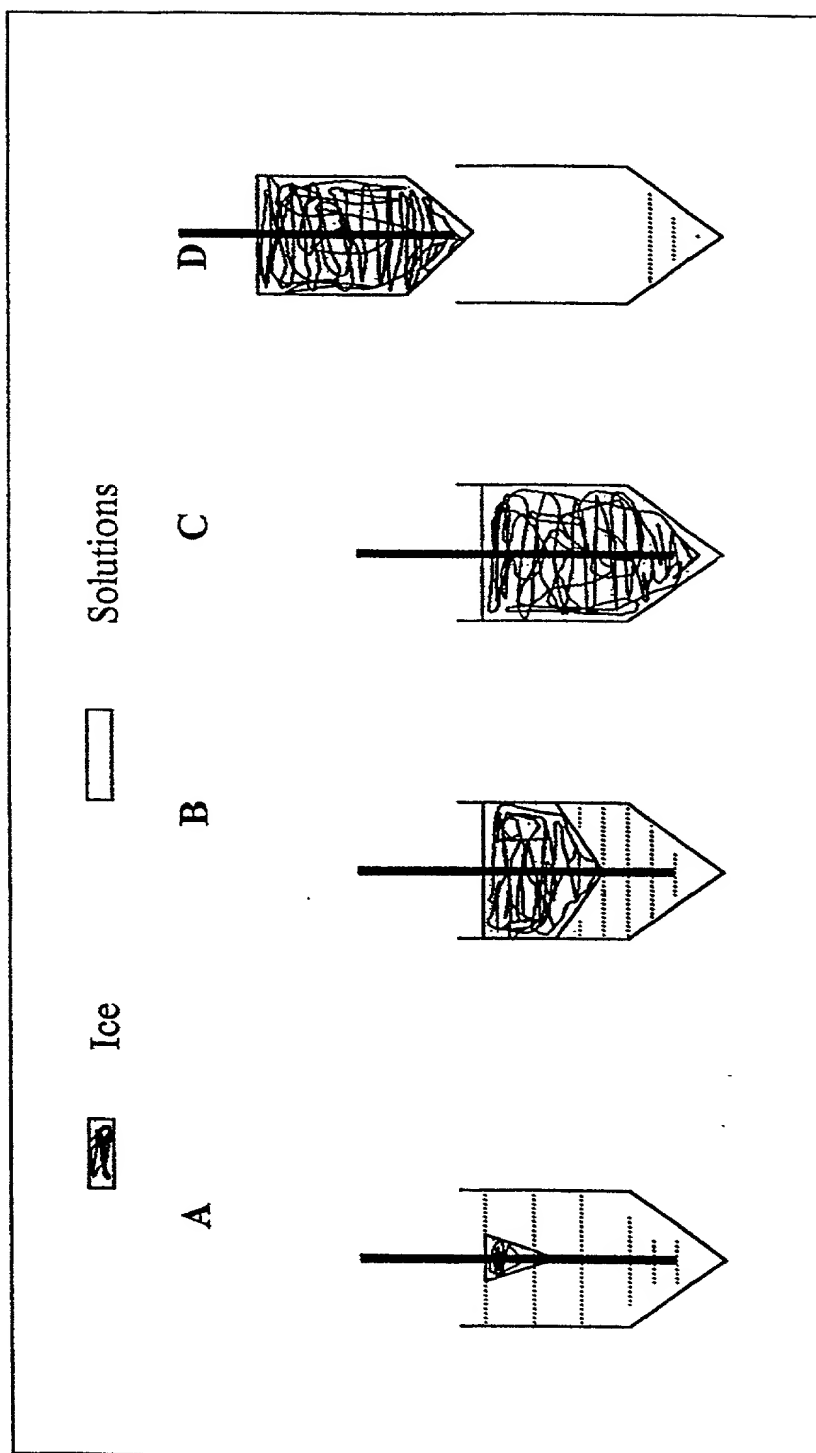


Fig. 3

- 4/7 -

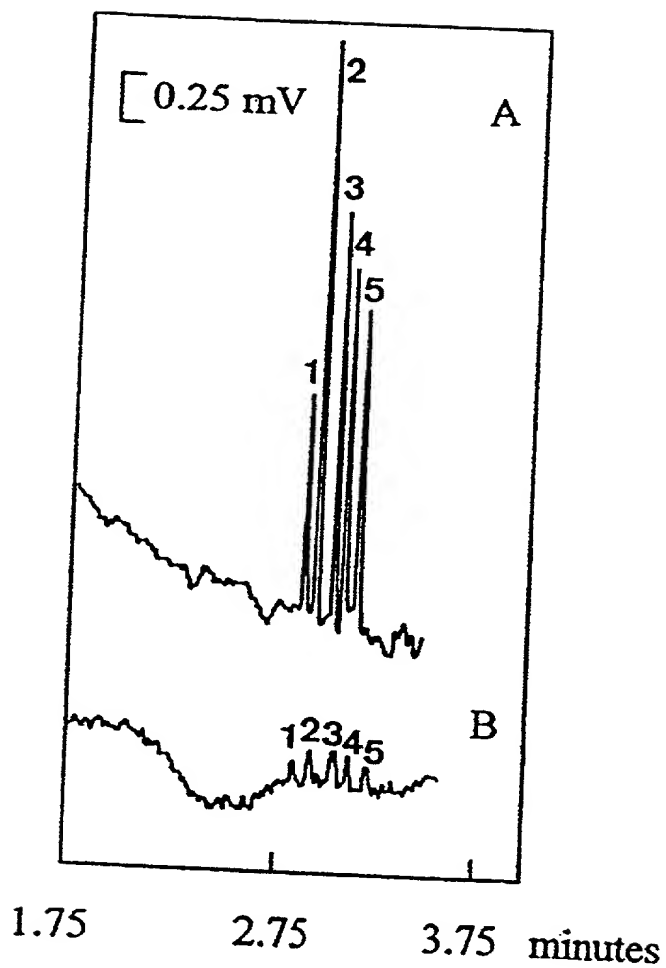


Fig. 4

- 5/7 -

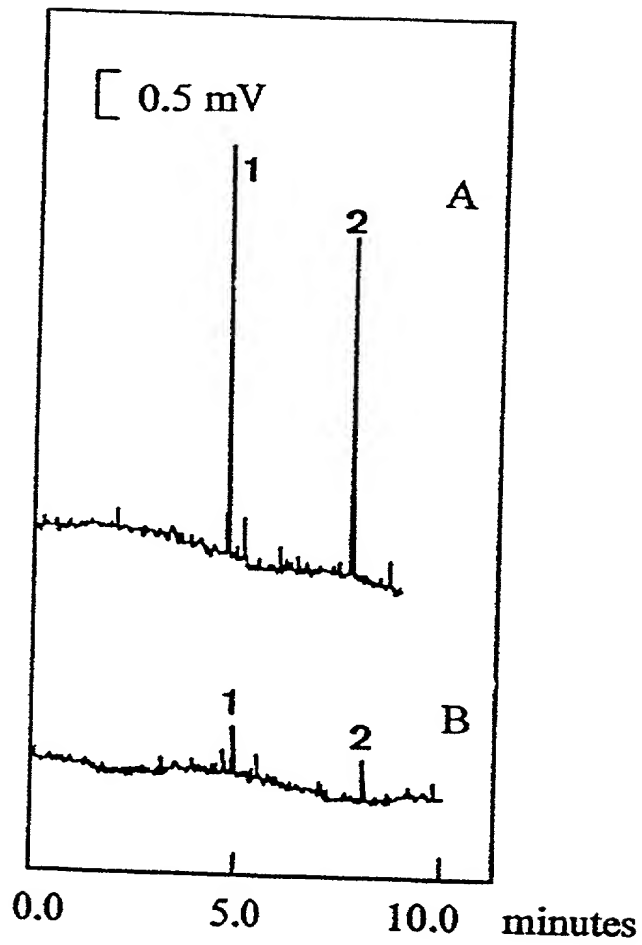


Fig. 5


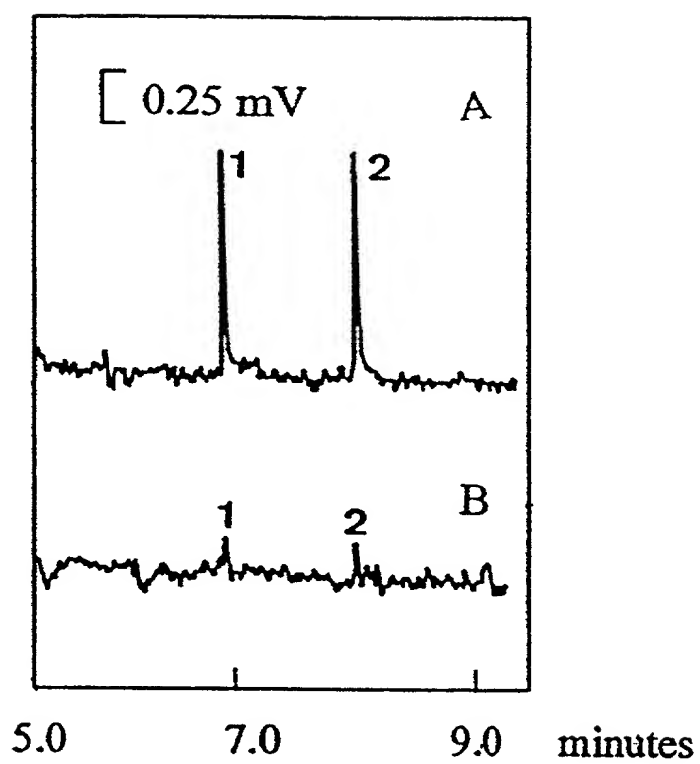


Fig. 6

- 77 -

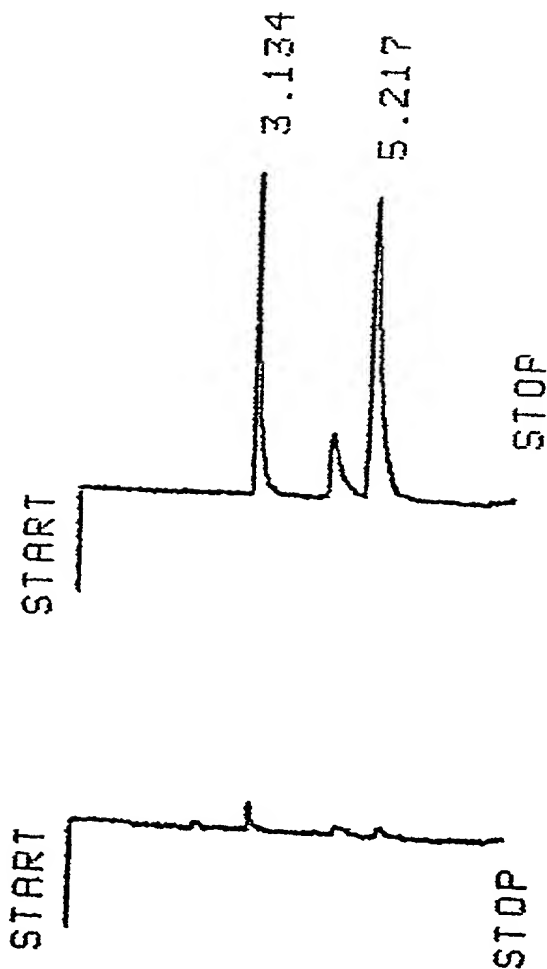

B

A

Fig. 7

BIRCH, STEWART, KOLASCH & BIRCH, LLPP.O. Box 747 • Falls Church, Virginia 22040-0747
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT AND DESIGN APPLICATIONS**

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Insert Title:

DEVICE AND METHOD FOR CONCENTRATION OF SAMPLES BY MICROCRYSTALLIZATIONFill in Appropriate
Information -
For Use Without
Specification
Attached:

the specification of which is attached hereto. If not attached hereto,
the specification was filed on May 11, 2001 _____ as
United States Application Number 09/831,551 _____;
and amended on _____ (if applicable) and/or
the specification was filed on _____ as PCT
International Application Number PCT/SG99/00117 _____;
amended under PCT Article 19 on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)**Priority Claimed**Insert Priority
Information:
(if appropriate)

| | | | | |
|------------------------------|-------------------------------|--|---|-----------------------------|
| <u>9804033-0</u> (Number) | <u>Singapore</u> (Country) | <u>November 12, 1998</u> (Month/Day/Year Filed) | <input checked="" type="checkbox"/> Yes | <input type="checkbox"/> No |
| _____ (Number) | _____ (Country) | _____ (Month/Day/Year Filed) | <input type="checkbox"/> Yes | <input type="checkbox"/> No |
| _____ (Number) | _____ (Country) | _____ (Month/Day/Year Filed) | <input type="checkbox"/> Yes | <input type="checkbox"/> No |
| _____ (Number) | _____ (Country) | _____ (Month/Day/Year Filed) | <input type="checkbox"/> Yes | <input type="checkbox"/> No |

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional applications(s) listed below.

Insert Provisional
Application(s):
(if any)

| | |
|-------------------------------|------------------------|
| _____ (Application Number) | _____ (Filing Date) |
| _____ (Application Number) | _____ (Filing Date) |

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

| Country | Application Number | Date of Filing (Month/Day/Year) |
|---------|--------------------|---------------------------------|
| _____ | _____ | _____ |
| _____ | _____ | _____ |

Insert Requested
Information:
(if appropriate)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States and/or PCT application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Insert Prior U.S.
Application(s):
(if any)

| | | |
|-------------------------------|------------------------|--|
| _____ (Application Number) | _____ (Filing Date) | _____ (Status - patented, pending, abandoned) |
| _____ (Application Number) | _____ (Filing Date) | _____ (Status - patented, pending, abandoned) |

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart
Joseph A. Kolasch
Bernard L. Sweeney
Charles Gorenstein
Leonard R. Svensson
Andrew D. Meikle
Joe McKinney Muncy
John W. Bailey
Gary D. Yacura
Mark J. Nuell

(Reg. No. 21,066)
(Reg. No. 22,463)
(Reg. No. 24,448)
(Reg. No. 29,271)
(Reg. No. 30,330)
(Reg. No. 32,868)
(Reg. No. 32,334)
(Reg. No. 32,881)
(Reg. No. 35,416)
(Reg. No. 36,623)

Terrell C. Birch
James M. Slattery
Michael K. Mutter
Gerald M. Murphy, Jr.
Terry L. Clark
Marc S. Weiner
Donald J. Daley
John A. Castellano
Thomas S. Auchterlonie

(Reg. No. 19,382)
(Reg. No. 28,380)
(Reg. No. 29,680)
(Reg. No. 28,977)
(Reg. No. 32,644)
(Reg. No. 32,181)
(Reg. No. 34,313)
(Reg. No. 35,094)
(Reg. No. 37,275)

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP
P.O. Box 747 • Falls Church, Virginia 22040-0747
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

or Customer No. 2292

PLEASE NOTE:
YOU MUST
COMPLETE
THE
FOLLOWING:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First
or Sole Inventor:
Insert Name of
Inventor
Insert Date This
Document is Signed

Insert Residence
Insert Citizenship

Insert Post Office
Address

Full Name of Second
Inventor, if any:
see above

Full Name of Third
Inventor, if any:
see above

Full Name of Fourth
Inventor, if any:
see above

| | | |
|---|--|---|
| GIVEN NAME/FAMILY NAME Sam Fong Yao LI | INVENTOR'S SIGNATURE <i>[Signature]</i> | DATE* 7/17/2001 |
| Residence (City, State & Country) Singapore SGX | | CITIZENSHIP Singapore |
| MAILING ADDRESS (Complete Street Address including City, State & Country) c/o INTRO, National University of Singapore, 10 Kent Ridge Crescent 119260 Singapore | | |
| GIVEN NAME/FAMILY NAME Hong-ping WEI | INVENTOR'S SIGNATURE <i>[Signature]</i> | DATE* 7/17/2001 |
| Residence (City, State & Country) Singapore SGX | | CITIZENSHIP PEOPLE REPUBLIC OF CHINA |
| MAILING ADDRESS (Complete Street Address including City, State & Country) c/o INTRO, National University of Singapore, 10 Kent Ridge Crescent 119260 Singapore | | |
| GIVEN NAME/FAMILY NAME | INVENTOR'S SIGNATURE | DATE* |
| Residence (City, State & Country) | | CITIZENSHIP |
| MAILING ADDRESS (Complete Street Address including City, State & Country) | | |
| GIVEN NAME/FAMILY NAME | INVENTOR'S SIGNATURE | DATE* |
| Residence (City, State & Country) | | CITIZENSHIP |
| MAILING ADDRESS (Complete Street Address including City, State & Country) | | |